



AGM ST130

According to EN 50342



Electrical specification

| | |
|-------------------------------|--------------------|
| Voltage: | 12V |
| Capacity: | 140 Ah |
| Cold cranking current: | 1000 A [EN] |
| Cold cranking current: | 600 A [DIN] |

Mechanical specification

| | |
|----------------------------|--------------------|
| Dimensional group: | A |
| ETN reference: | 640 901 100 |
| DIN reference: | 64001 |
| Dimensions (LxWxH): | 513x189x223 |
| Cell Layout: | 3 |
| Terminal Type: | 1 |

Container

| | | |
|-------------|-------------------------|----------------------|
| Case | Material | Polypropylene |
| | Bottom hold-down | B0 |
| | Colour | Black |

| | | |
|------------|---------------------|----------------------|
| Lid | Material | Polypropylene |
| | Cover design | Kamina |
| | Colour | Black |

| | | |
|------------------|-----------------|----------------------|
| Vent caps | Material | Polypropylene |
| | Type | Kamina |
| | Colour | Black |

| | | |
|----------------|-----------------|-----------------------------|
| Handles | Material | Polypropylene |
| | Position | Sides - on container |
| | Colour | Black |


Battery classification as per EN 50342-6

| | | | |
|--------------------------|-------------------------|-----------------------------|------------------------|
| Water consumption | Charge retention | Vibration resistance | Endurance Level |
| W4 | C2 | V3 | E3 |

Weight

| | |
|------------------------------|--------------|
| Battery weight: | 30.40 |
| Acid weight: | 10.30 |
| Total battery weight: | 40.70 |

Layout

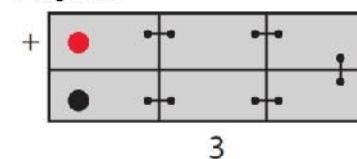

Hold-down



Separator

| | |
|-------------|------------|
| Type | AGM |
|-------------|------------|