



# LP12-1.2 (12V 1.2Ah)

Specifications	
Rated Voltage	12
Nominal Capacity	1.2Ah (C <sub>20</sub> , 1.75V/cell)
Dimensions	Length 97 mm
	Width 43 mm
	Container Height 52 mm
	Total Height 58 mm
Approx. Weight	0.57 Kg (1.26lbs)
Terminal	T1
Layout	4
Container material	ABS
Rated Capacity (25°C)	1.20 Ah (20hr, 0.060A, 1.75V/cell)
	1.13 Ah (10hr, 0.113A, 1.75V/cell)
	1.04 Ah (5hr, 0.207A, 1.75V/cell)
	0.92 Ah (3hr, 0.306A, 1.75V/cell)
	0.79 Ah (1hr, 0.789A, 1.60V/cell)
Max. Discharge Current	18A (5s)
Internal Resistance (25°C)	Approx 110mΩ
	Discharge: -15°C ~50°C (5~122°F)
Operating Temp. Range	Charge: 0°C ~40°C (32~104°F)
	Storage: -15°C ~40°C (5~104°F)
	Nominal Operating Temp. Range 25±3°C (77±5°F)
Cycle Use	Initial Charging Current less than 0.36A. Voltage 14.4V~15.0V at 25°C (77 °F)Temp. Coefficient -30mV/°C
	Standby Use Initial Charging Current less than 0.36A. Voltage 13.5V~13.8V at 25°C (77 °F)Temp. Coefficient -20mV/°C
Effect Of Temp. To Capacity	40°C (104°F) 103%
	25°C (77°F) 100%
	0°C (32°F) 86%
Self Discharge	LP series batteries may be stored for up to 6 months at 25°C (77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.



## Description and Features

The LP Series AGM batteries have been specially developed to be widely applicable. These lead acid batteries with AGM technology are completely sealed and therefore 100% maintenance free and leak-proof. These batteries have a low self-discharge. The reliable and safe multipurpose batteries from the LP Series offer a long service life and can be used in various industries.

### Features

- Absorbent Glass Mat technology
- Reliable and safe performance
- Long service life - 3-5 years in standby application (at 25°C)
- Suitable for multipurpose applications

Layout	Terminal	UL certification


Constant Current Discharge Characteristics: A (25°C)																
F.V/Time	5 Min	10 Min	15 Min	20 Min	30 Min	45 Min	1Hr	1.5 Hr	2 Hr	3 Hr	4 Hr	5 Hr	6 Hr	8 Hr	10 Hr	20 Hr
1.85V/cell	3.73	2.28	1.78	1.48	1.10	0.813	0.714	0.523	0.411	0.296	0.236	0.201	0.172	0.136	0.111	0.059
1.80V/cell	4.01	2.42	1.86	1.54	1.14	0.835	0.731	0.534	0.418	0.301	0.240	0.204	0.175	0.138	0.112	0.059
1.75V/cell	4.23	2.52	1.92	1.59	1.17	0.853	0.746	0.543	0.426	0.306	0.243	0.207	0.177	0.139	0.113	0.060
1.70V/cell	4.43	2.62	1.99	1.63	1.20	0.872	0.760	0.553	0.432	0.311	0.246	0.209	0.179	0.141	0.115	0.060
1.67V/cell	4.58	2.69	2.04	1.67	1.22	0.886	0.771	0.560	0.437	0.314	0.249	0.211	0.181	0.142	0.115	0.061
1.60V/cell	4.86	2.80	2.11	1.72	1.25	0.908	0.789	0.572	0.446	0.319	0.253	0.215	0.183	0.144	0.117	0.062

Constant Power Discharge Characteristics: Wpc (25°C)																
F.V/Time	5 Min	10 Min	15 Min	20 Min	30 Min	45 Min	1Hr	1.5 Hr	2 Hr	3 Hr	4 Hr	5 Hr	6 Hr	8 Hr	10 Hr	20 Hr
1.85V/cell	7.06	4.34	3.40	2.86	2.13	1.58	1.39	1.02	0.804	0.583	0.465	0.397	0.341	0.269	0.220	0.117
1.80V/cell	7.52	4.57	3.55	2.96	2.19	1.61	1.42	1.04	0.817	0.591	0.471	0.402	0.345	0.273	0.223	0.119
1.75V/cell	7.84	4.72	3.64	3.02	2.23	1.64	1.44	1.05	0.830	0.599	0.477	0.407	0.349	0.275	0.225	0.120
1.70V/cell	8.13	4.87	3.74	3.09	2.28	1.67	1.46	1.07	0.840	0.607	0.483	0.412	0.353	0.278	0.227	0.121
1.67V/cell	8.34	4.98	3.82	3.15	2.32	1.70	1.48	1.08	0.848	0.612	0.487	0.415	0.356	0.280	0.229	0.122
1.60V/cell	8.68	5.13	3.92	3.23	2.37	1.73	1.51	1.10	0.862	0.621	0.494	0.420	0.360	0.284	0.232	0.123




# LP12-1.2 (12V 1.2Ah)


## Discharge Characteristics

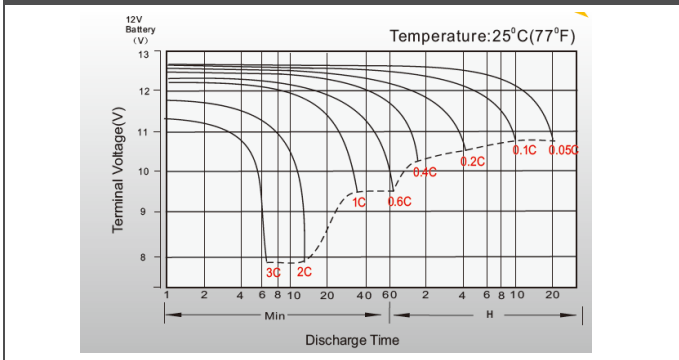


## Float Charging Characteristics

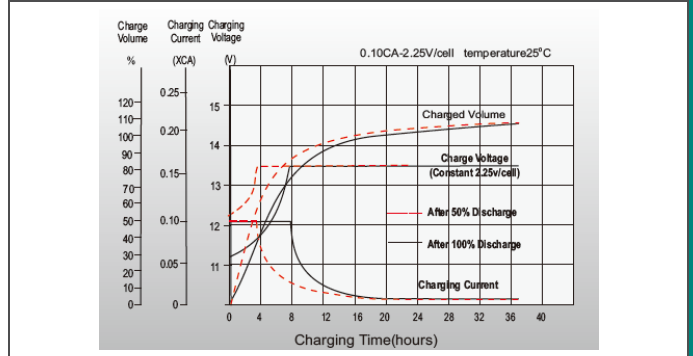

## Temperature Effects In Relation To Battery Capacity

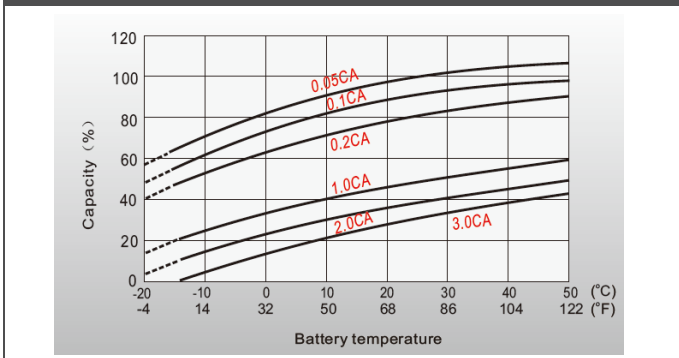

## Float Service Life

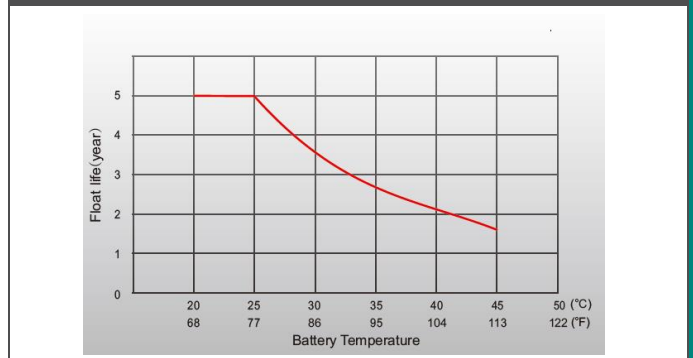

### Applications

- All purpose
- Uninterruptable Power Supply (UPS)
- Electric Power System (EPS)
- Emergency backup power supply
- Alarm and security system
- Communication power supply
- DC power supply
- Auto control system

### General Features

- 5 years design life(25°C)
- Special exhaust structure and sealing technology, safe and reliable, flexible installation, convenient maintenance
- PbCaSn alloy for plate grids: less gassing, less self-discharging
- High quality AGM separator: extend cycle life and prevent micro short circuit
- High purity raw material: ensure low self discharge rate

### Standards

- Compliance with IEC 60896 standards, EU Battery Directive
- UL, CE Certified
- IATF16949, ISO45001, ISO 9001 and ISO 14001 certified production facilities

(Note) All above information shall be changed without prior notice, Landport Batteries reserves the right to explain and update the latest information.