



# LP12-24 (12V 24Ah)

Specifications	
Rated Voltage	12
Nominal Capacity	24.0Ah (C <sub>20</sub> , 1.75V/cell)
Dimensions	Length 166 mm
	Width 175 mm
	Container Height 125 mm
	Total Height 125 mm
Approx. Weight	7.2 Kg (15.9 lbs)
Terminal	T3
Layout	0
Container material	ABS
Rated Capacity (25°C)	24.0 Ah (20hr, 1.20A, 1.75V/cell)
	22.7 Ah (10hr, 2.27A, 1.75V/cell)
	19.9 Ah (5hr, 3.97A, 1.75V/cell)
	17.3 Ah (3hr, 5.75A, 1.75V/cell)
14.3 Ah (1hr, 14.3A, 1.60V/cell)	
Max. Discharge Current	360A (5s)
Internal Resistance (25°C)	Approx 18mΩ
	Discharge: -15°C ~50°C (5~122°F)
Operating Temp. Range	Charge: 0°C ~40°C (32~104°F)
	Storage: -15°C ~40°C (5~104°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)
Cycle Use	Initial Charging Current less than 7.2A. Voltage 14.4V~15.0V at 25°C (77 °F)Temp. Coefficient -30mV/°C
	Initial Charging Current less than 7.2A. Voltage 13.5V~13.8V at 25°C (77 °F)Temp. Coefficient -20mV/°C
Standby Use	40°C (104°F) 103%
	25°C (77°F) 100%
Effect Of Temp. To Capacity	0°C (32°F) 86%
	LP series batteries may be stored for up to 6 months at 25°C (77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.
Self Discharge	



## Description and Features

The LP Series AGM batteries have been specially developed to be widely applicable. These lead acid batteries with AGM technology are completely sealed and therefore 100% maintenance free and leak-proof. These batteries have a low self-discharge. The reliable and safe multipurpose batteries from the LP Series offer a long service life and can be used in various industries.

- Features**
- Absorbent Glass Mat technology
  - Reliable and safe performance
  - Long service life - 3-5 years in standby application (at 25°C)
  - Suitable for multipurpose applications

Layout	Terminal	UL certification


Constant Current Discharge Characteristics: A (25°C)																
F.V/Time	5 Min	10 Min	15 Min	20 Min	30 Min	45 Min	1 Hr	1.5 Hr	2 Hr	3 Hr	4 Hr	5 Hr	6 Hr	8 Hr	10 Hr	20 Hr
1.85V/cell	60.6	42.2	33.8	28.1	21.2	15.6	13.0	9.61	7.63	5.57	4.49	3.86	3.34	2.67	2.22	1.17
1.80V/cell	65.2	44.7	35.5	29.3	21.8	16.1	13.3	9.80	7.78	5.66	4.55	3.92	3.40	2.71	2.25	1.19
1.75V/cell	68.7	46.5	36.7	30.1	22.4	16.4	13.6	10.0	7.92	5.75	4.61	3.97	3.43	2.74	2.27	1.20
1.70V/cell	72.0	48.4	37.9	30.9	23.0	16.8	13.8	10.2	8.03	5.84	4.68	4.02	3.48	2.76	2.29	1.21
1.67V/cell	74.4	49.8	38.9	31.6	23.4	17.1	14.0	10.3	8.12	5.89	4.72	4.06	3.51	2.79	2.31	1.22
1.60V/cell	79.0	51.9	40.2	32.5	24.0	17.5	14.3	10.5	8.29	6.00	4.81	4.12	3.56	2.82	2.34	1.23

Constant Power Discharge Characteristics: Wpc (25°C)																
F.V/Time	5 Min	10 Min	15 Min	20 Min	30 Min	45 Min	1 Hr	1.5 Hr	2 Hr	3 Hr	4 Hr	5 Hr	6 Hr	8 Hr	10 Hr	20 Hr
1.85V/cell	114.7	80.3	64.8	54.2	40.9	30.4	25.2	18.8	14.9	10.9	8.84	7.62	6.61	5.29	4.41	2.35
1.80V/cell	122.2	84.6	67.6	56.1	42.0	31.1	25.8	19.1	15.2	11.1	8.95	7.72	6.71	5.36	4.46	2.37
1.75V/cell	127.3	87.3	69.4	57.3	42.9	31.6	26.2	19.4	15.4	11.3	9.06	7.81	6.77	5.41	4.50	2.40
1.70V/cell	132.0	90.2	71.3	58.6	43.8	32.2	26.6	19.7	15.6	11.4	9.17	7.91	6.85	5.46	4.55	2.42
1.67V/cell	135.5	92.2	72.8	59.7	44.4	32.6	26.9	19.9	15.8	11.5	9.25	7.96	6.90	5.50	4.58	2.44
1.60V/cell	141.0	94.9	74.8	61.2	45.4	33.2	27.4	20.2	16.0	11.7	9.39	8.07	6.99	5.58	4.63	2.47




# LP12-24 (12V 24Ah)


## Discharge Characteristics

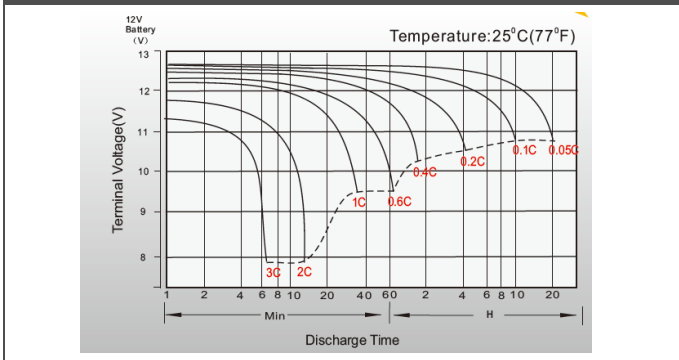


## Float Charging Characteristics

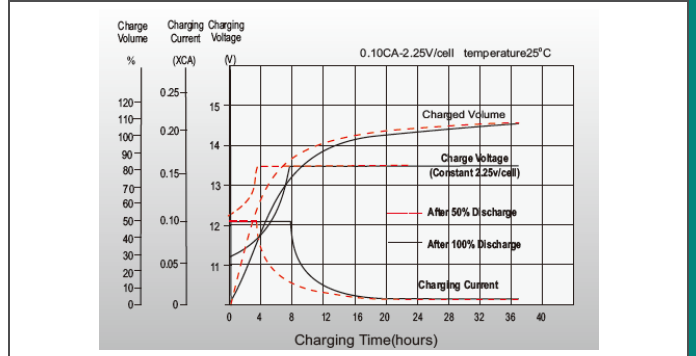

## Temperature Effects In Relation To Battery Capacity

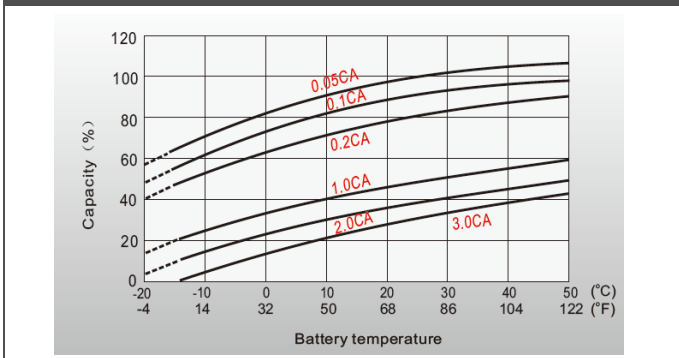

## Float Service Life

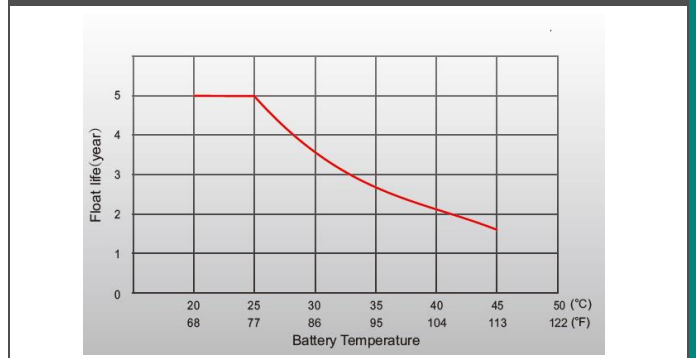

### Applications

- All purpose
- Uninterruptable Power Supply (UPS)
- Electric Power System (EPS)
- Emergency backup power supply
- Alarm and security system
- Communication power supply
- DC power supply
- Auto control system

### General Features

- 5 years design life(25°C)
- Special exhaust structure and sealing technology, safe and reliable, flexible installation, convenient maintenance
- PbCaSn alloy for plate grids: less gassing, less self-discharging
- High quality AGM separator: extend cycle life and prevent micro short circuit
- High purity raw material: ensure low self discharge rate

### Standards

- Compliance with IEC 60896 standards, EU Battery Directive
- UL, CE Certified
- IATF16949, ISO45001, ISO 9001 and ISO 14001 certified production facilities

(Note) All above information shall be changed without prior notice, Landport Batteries reserves the right to explain and update the latest information.