

**FEATURES** Lithium Iron Phosphate (LiFePO4): the Safest Lithium Technology.  
 Integrated Battery Management System(BMS).  
 Bluetooth/RS485/RS232/SMBus/CANBus (Optional).  
 SOC LED/LCD Indicator(Optional).

**PERFORMANCE** Long Cycle Life > 2000cycles @ 100% DOD.  
 High Density, High Discharge Current, High Temperature Range.  
 Low Weight, Free Maintenance.  
 Fast Charging.  
 Environment Friendly.



12.8 - 200 (12.8V200Ah)

## BATTERY DATA SHEET

### Electrical Parameters

Nominal Voltage	12.8V
Rated Capacity	200Ah
Energy	2560Wh
Resistance	≤30m Ω
Efficiency	99%
Cycle Life	>2000cycles @1C, 100% DOD
Self Discharge	2% per Month
Max. Modules in Series/Parallel	4S/20P

### Mechanical Parameters

Dimension(L x W x H)	522x 240x 224 mm 20.6 x 9.4x 8.8"
Weight	29.6kg(65.26lbs)
Terminal Type	M8
Battery Housing	ABS, UL-94 V-0
Housing Protection	IP56
Cell Type-Chemistry	LiFePO4 Cylindrical Cell
SOC Display(Optional)	LED/LCD Indicator

### Discharge Parameters

Continuous Discharge Current	150A
Pulse Discharge Current	400A(1 seconds)
Recommended Volt. Disconnect	10V
BMS Discharge Cut-off Voltage	8V
Reconnect Voltage	9.2V
Short Circuit Protection	200~600 us

### Charge Parameters

Charge Method	CC-CV
Charge Voltage	14.4~14.8V
Recommended Float Voltage	13.8V
Recommended Charge Current	40A
Maximum Charge Current	150A
BMS Charge Cut-off Voltage	15.6V

### Compliance Certificate

Certifications	UL1642(cecl)
	CE
	IEC62133 & CB
	KC
Shipping Classification	BIS
	UN3480, Class 9, UN38.3


### Temperature Parameters

Discharge Temperature	-30 to 60°C (-22 to 140°F)
Charge Temperature	0 to 45°C (32 to 113°F)
Storage Temperature	-40 to 60°C(-40 to 140°F)
BMS High Temperature Cut-off	80°C(176°F)




## Performance Charateristics


CYCLE LIFE vs. DEPTH OF DISCHARGE(DOD)  
DISCHARGE@1C, 25°C

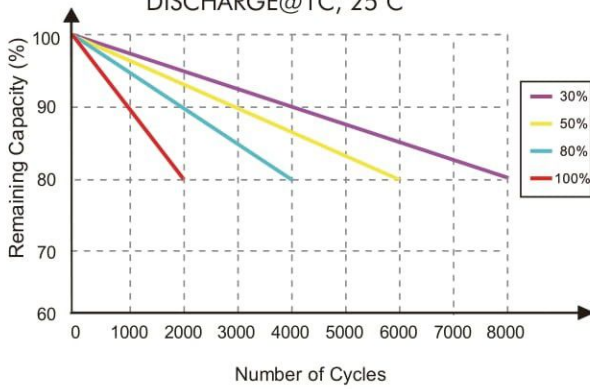


DISCHARGE CAPACITY at VARIOUS TEMPERATURES  
DISCHARGE @1C

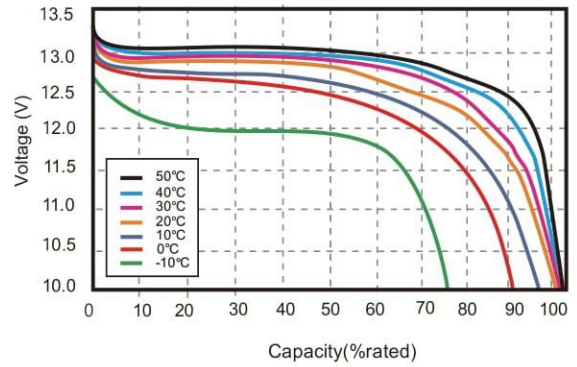

STATE OF CHARGE CURVE @1C, 25 °C

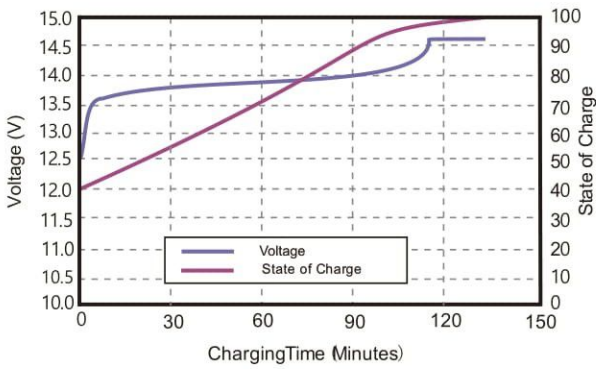


CHARGING CHARACTERISTICS @1C, 25 °C

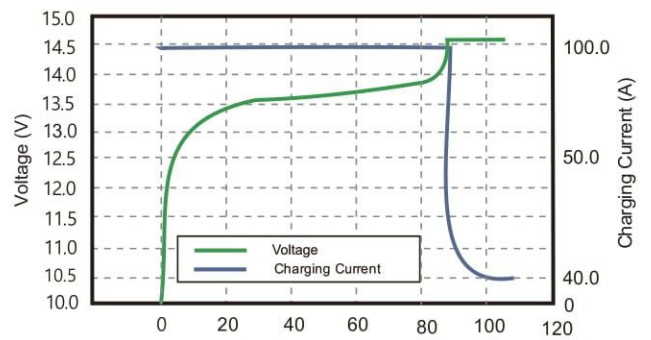

## Battery Dimension



M8 - 1.0x 8mm  
Threaded Hole



## Battery Applications

- + Data Center UPS
- + Telecom Backup Power
- + Military Power Supply
- + Solar Energy Storage System
- + Solar Street LED Lightings
- + Autonomously Guided Vehicles (AGVs)
- + Industrial Robotics & Handling Equipment
- + Aerial Work Platform
- + Floor Cleaning Machines
- + Power Tools, Lawn Mower
- + Electric Bike & Motorcycles
- + Electric Mobilities( E-scooters, Wheelchair)
- + Golf Trolley & Golf Carts
- + Medical Devices
- + Electric Ships
- + Passenger Vehicles

## Battery Recycle



**NOTE:** Do Not Mix With Sealed Lead Acid Batteries When Recycling.