






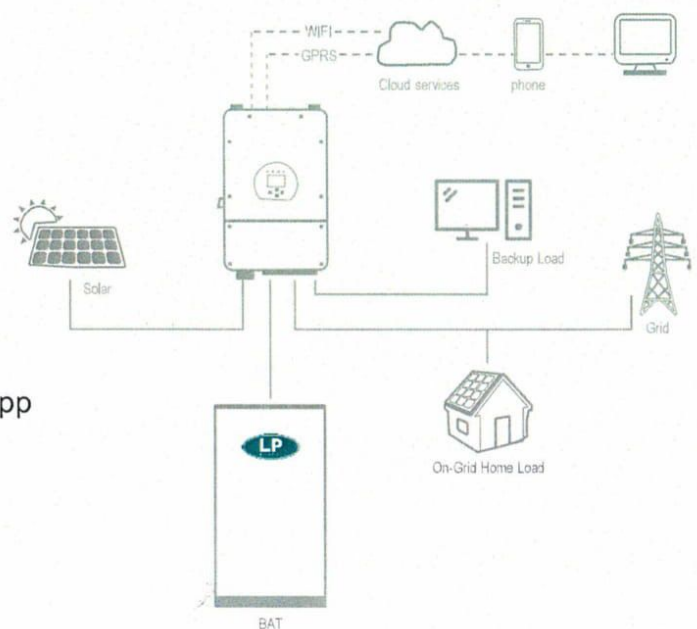
RESS-EU-5096/80192-DS more powerful, more efficient

New intelligent platform use new energy



KEY FEATURES

-  24-hour clean energy supplying
-  Flexible design, easy to scale up
-  Automatically on/off-grid switch
-  Real-time monitoring at anywhere via app
-  Fast, easy installation



SPECIFICATIONS

System specification	5kW-9.6kWh	8kW-19.2kWh
Battery data		
System capacity	9.6kWh	19.2kWh
Battery capacity	200Ah	400Ah
Rated voltage	48V	
Voltage range	42~51.5V	
Max. charging current	100A	150A
Max. discharge current	120A	190A
PV string input		
PV input max. power	6500W	10400W
PV input voltage range	370V (100V~500V)	
MPPT voltage range	125V~425V	
PV input current	11A+11A	18A+18A
Number of MPPT	2	
Efficiency		
Max. Efficiency	97.6%	
Euro Efficiency	97.0%	
MPPT Efficiency	99.0%	
AC output		
Rated output power	5000W	8000W
Max. output power	5500W	8800W
Peak power(off-grid)	2 times of rated power @10s	
Rated output current	20.8A	33.4A/35A
Max. output current	24A	38.3/40A
Output voltage	230Vac (single phase)	
Output frequency	50/60Hz (45-55Hz/55-65Hz)	
Current harmonics	THD<3% (Linear load <1.5%)	
General Data		
Working temperature	-10~45 C	
Cooling mode	Fan	
Size (W*H*D, mm)	570*1150*285 (Battery cabinet), 420*680*233 (8kW PCS)/330*580*208(5kW PCS)	
Weigh	150kg (Battery cabinet), 20.5kg(5kW PCS)/32kg(8kW PCS)	
Humidity	≤95%RH	
Altitude	≤2000m	
Protection level	IP55 (Battery cabinet), IP65 (PCS)	
Communication with BMS	RS485/CAN	
Authentication certificate	UN38.3, IEC62619 (Battery); VDE0126,AS4777,G89,G99,IEC62109-1,IEC62109-2,EN61000 (PCS)	