

# Charger SCZ15 1A - 4,5A



The **SCZ15** is the new charger of the **SC CHARGER** trademark, controlled by microprocessor and equipped with a large LCD display.

This charger / maintainer is ideal for powersports, scooters, jet skis, ATVs and lawn mowers but also for cars and vans with batteries up to 140 Ah.

Easy-to-use: plug to the battery, connect the charger to the mains and choose the battery type (if 12V). Then it is automatic!

No risk of battery overload.

Full Automatic for all lead acid batteries 6 and 12 Volts.



**Heavy Duty crocodile clamps and O-ring for easy connections are included**

## Technical specifications:

**Applications** For all lead acid batteries (conventional, maintenance-free, SLI, AGM, EFB and Gel) from 1,2Ah to 140 Ah.


**Input voltage** 100-240 Volts automatic

**Output voltage** 6V / 12 Volts automatic

**Output current** 1A - 4,5A automatic

**Smart charger** 6 charging steps controlled by microprocessor with maintenance phase

- ① Test
- ② Pulse charge for battery reconditioning.
- ③ Initiating of the charge
- ④ Bulk charge
- ⑤ Absorption charge
- ⑥ Maintenance charge

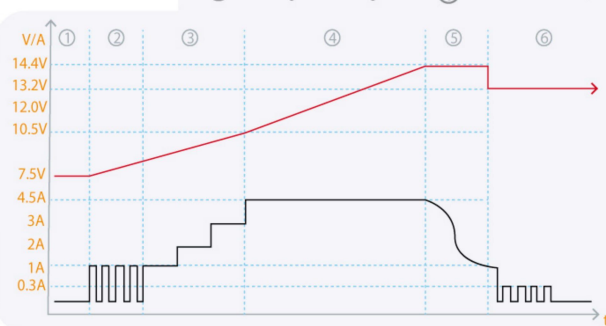

**LCD display indicators**

- Standard 12V, AGM 12V, hiver ou Standard 6V charging modes
- Charging progress
- Reverse polarity connection
- Bad contact of the crocodile clamps
- Battery voltage
- Defective battery

**Winter mode** Selection when recharging at low temperatures

**Ingress protection rate** IP65 (against water and dust)

**Protections** Reverse polarity, short circuit, spark proof, overload, overheat and auto-stop

**Certifications** **CE RoHS**

**Sizes / Poids** L 16,5 cm x w 7,5 cm x h 4,5 cm / 66 gr